


Quick Start Guide

Important !

Connect the charging adaptor to the G5 and charge for 4 hours before first use.

The LED display on the top of G5 indicates volume and battery level. When you power on G5 it will indicate the current battery charge level for 3 seconds. You can check the battery level at any time by pressing the battery check button on the rear of G5.

Press and hold the power button  on the top of the unit for two seconds to turn it on.

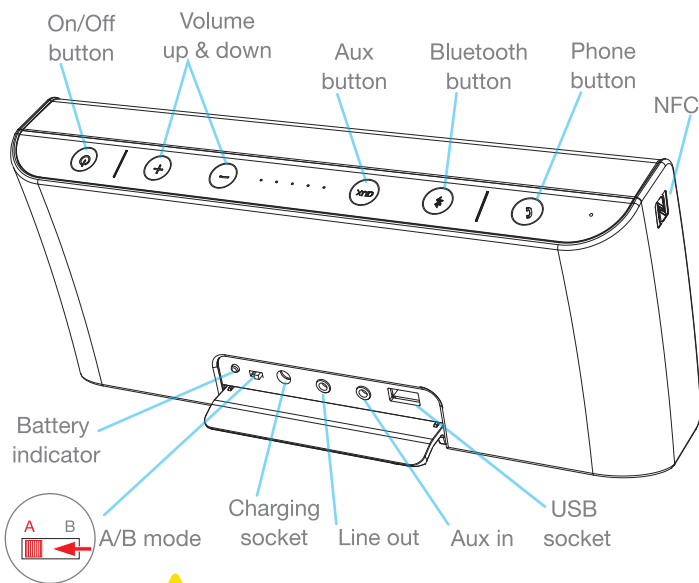



Caution

Please ensure that the mode switch is in position A for normal operation.

Bluetooth set-up

Press the BT button  to select the Bluetooth input.


Pairing your device manually

Press the BT button  to enter Bluetooth pairing mode. The flashing blue LED  indicates pairing mode.


Enable Bluetooth connectivity on your Bluetooth device (eg. phone, tablet etc) and pair with the G5 (you may need to consult your phone or tablet operating instructions).

If your Bluetooth device is NFC enabled


You may need to ensure Bluetooth is enabled on your device.

Touch your NFC device against the logo  on the side of G5. G5 will enter automatic pairing mode and 'G5 Cambridge' should appear on your device.


Pairing a second device

To pair a different device, press the BT button  a second time to enter pairing mode and pair your Bluetooth device as described in the Bluetooth instructions.


Aux input

Press the **AUX** button to select the Aux input. There is an Aux input on the rear of the unit that allows any analogue device to be connected. LED will turn orange  to indicate Aux input is selected.

Speakerphone

G5 has a built in microphone and can be used to answer and make phone calls from your connected device. If you have an incoming call the 'phone' button  will flash and you can choose to answer with G5 by pressing the button. If you make a call from a connected device, G5 will automatically switch to speakerphone mode.

Sync two G5


It is possible to synchronise two G5 speakers together so that both will play back your music simultaneously. Using the mode switch on the rear of G5, select 'A' on one and 'B' on the other and then double press the BT button  on each G5.

TOP TIPS

Auto power down

To save power, your G5 will automatically turn off after 10 minutes if no music is playing. Press the power button to turn the G5 back on.

Low battery warning

A flashing red LED  indicates that the battery is too low and the G5 will enter a standby mode where no music can be played. This LED will continue flashing for 30 minutes after which the G5 will turn off.

USB Charging

The G5 can be used to charge compatible mobile devices. If the charging adaptor is not connected this will discharge the battery.

! Battery Safety

Your G5 contains a high performance battery and charging system that is designed to work in temperatures that do not exceed 50°C (122°F). Leaving this product in an automobile where temperatures may exceed this limit may result in permanent battery damage, fire or explosion. Do not leave your product in any location where temperatures may exceed this limit. Please recharge the battery every two months to maintain the battery in optimal condition.

To talk to us, call +44 (0)203 514 1521 (UK Local)
or 1-877-357-8204 (USA)